
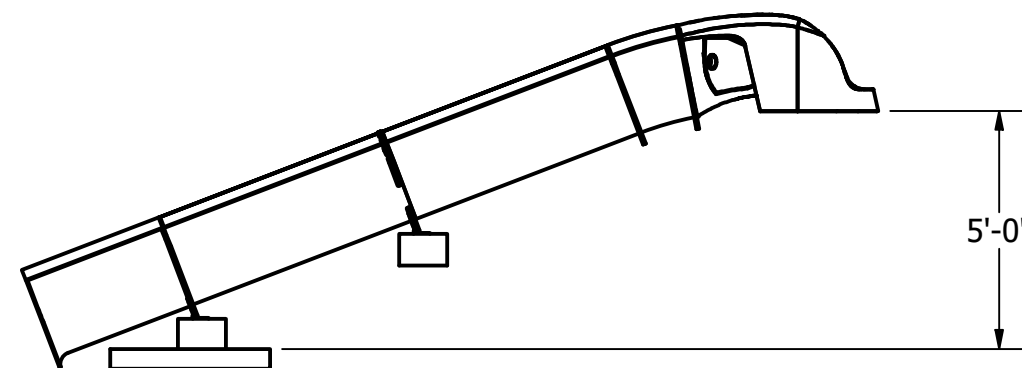
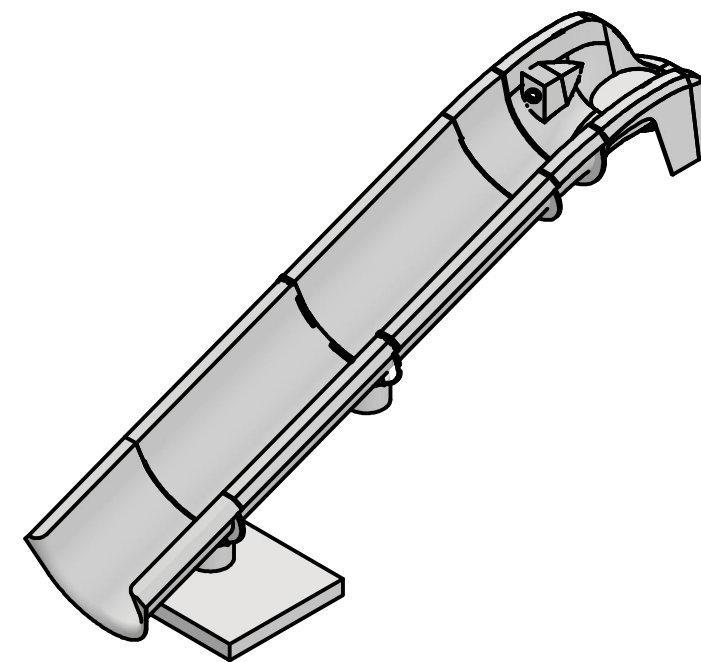


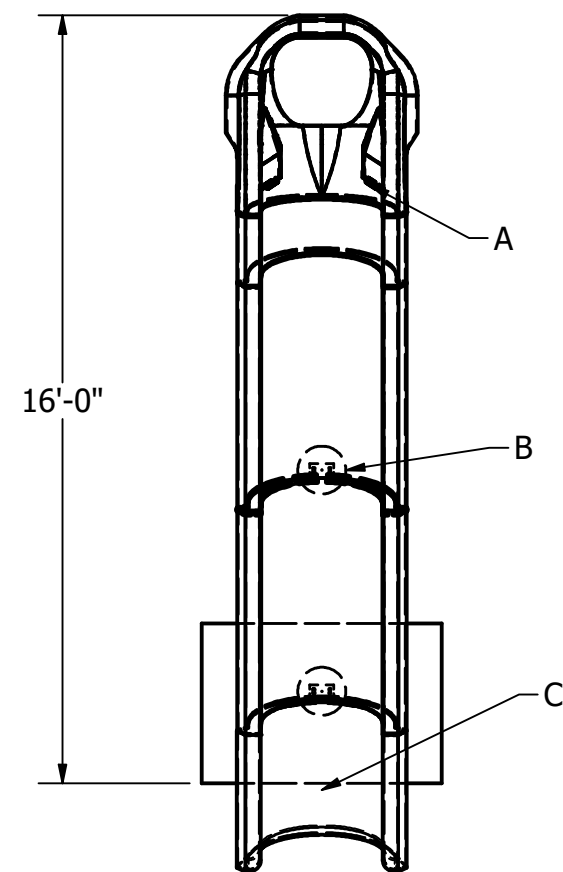

- A. (2) 3" PVC water outlets. One on each side of the start tub.
B. Flume Support Brackets (2) Recommended for use with 12" Concrete Columns (Columns are Not Provided)
C. Elevation @ Pool Coping 0'-2" Where Slide Crosses Coping. Recommend 5' Min. Clearance on either Side of Pool Exit.

Min. Slide Exit Splashdown Envelope: Min 10' Width x 14' Length. Min Water Depth 42" Recommend 72" for Large Slides and Steeper Versions

Slide Views			
Installation Drawing			
Paradise Slides, Inc.			
243 Singing Tree Ln, Cleveland GA 30528			
Flume Type:	32" Open Flume	Recommended GPM: 125-200 GPM	Ride Length: 17.60'
Drawing Scale:	1/4"=1'-0"	Drawn By: Tim	Slope: 35.36%
Date:	March 13, 2026	Model #	PS18T10-S
			Sheet #
			PS18T10