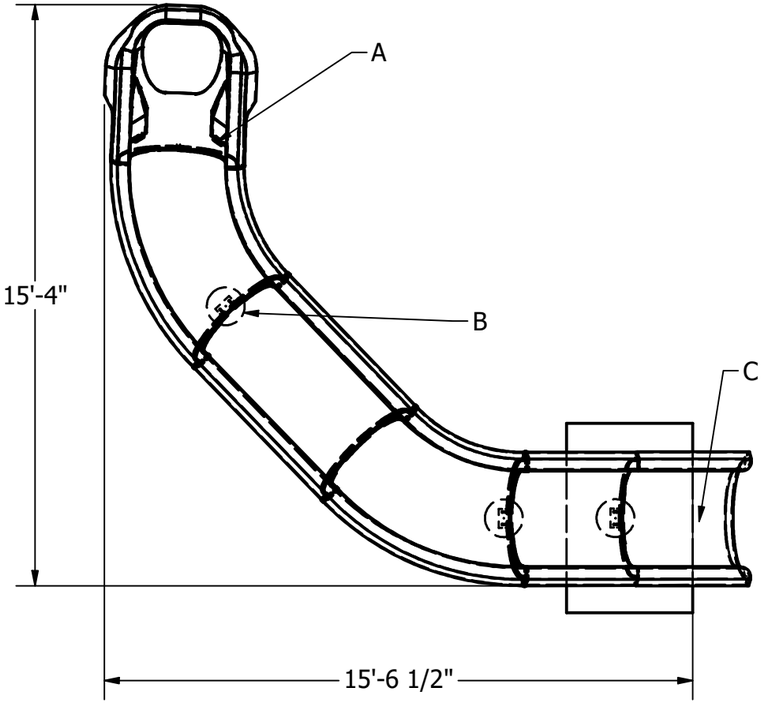

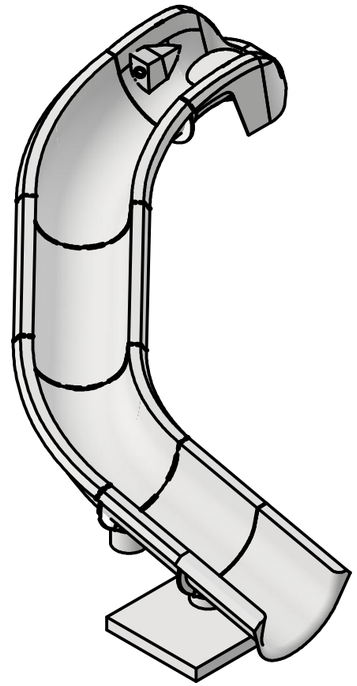

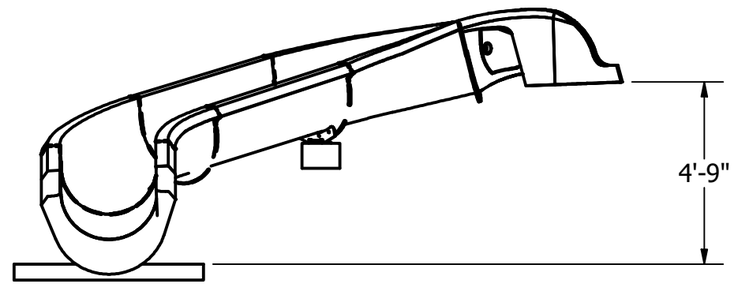

A. (2) 3" PVC water outlets. One on each side of the start tub.
B. Flume Support Brackets (3) Recommended for use with 12" Concrete Columns (Columns are Not Provided)
C. Elevation @ Pool Coping 0'-2" Where Slide Crosses Coping. Recommend 5' Min. Clearance on either Side of Pool Exit.

Min. Slide Exit Splashdown Envelope: Min 10' Width x 14' Length. Min Water Depth 42" Recommend 72" for Large Slides and Steeper Versions

Slide Views
Installation Drawing

Paradise Slides, Inc.

243 Singing Tree Ln, Cleveland GA 30528

Flume Type: 32" Open Flume	Recommended GPM: 200 GPM	Ride Length: 25.90'	
Drawing Scale: 1/4"=1'-0"	Drawn By: Tim	Slope: 22.91%	Sheet # PS26L
Date: March 13, 2026	Model # PS26L-S		