
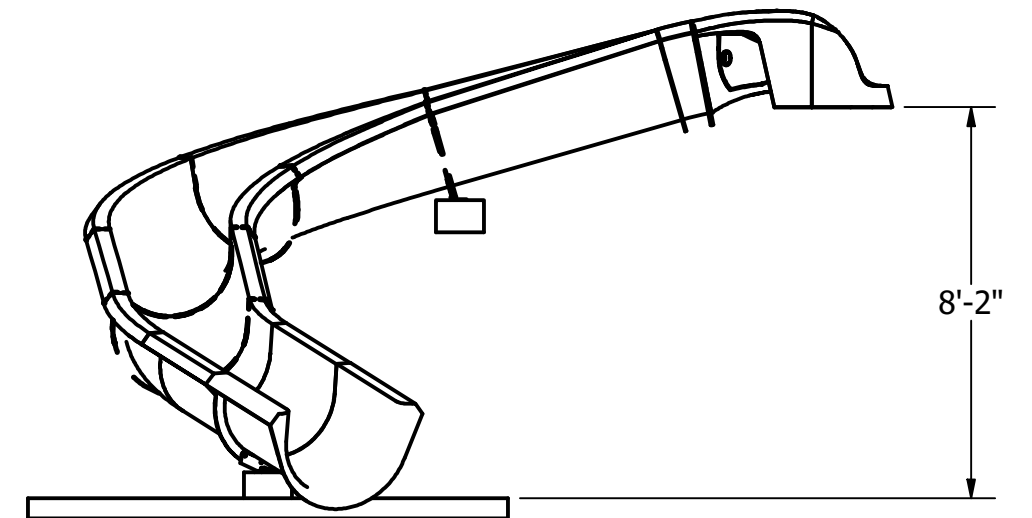
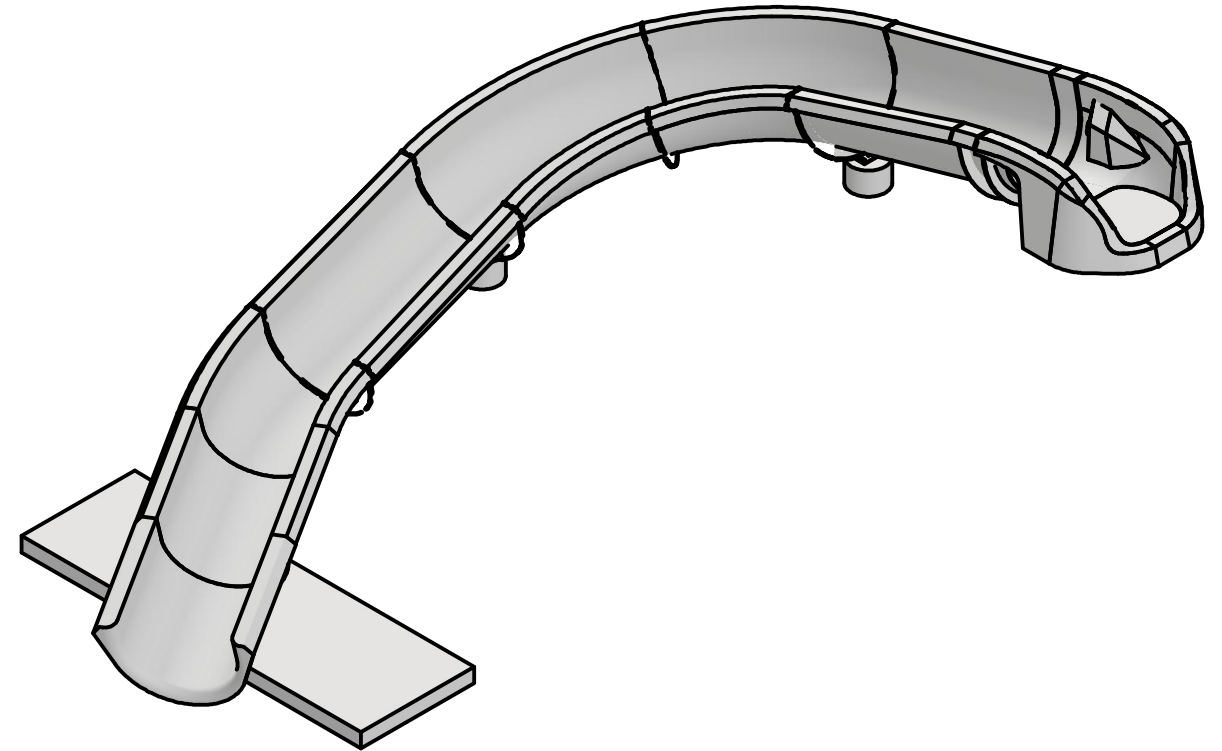


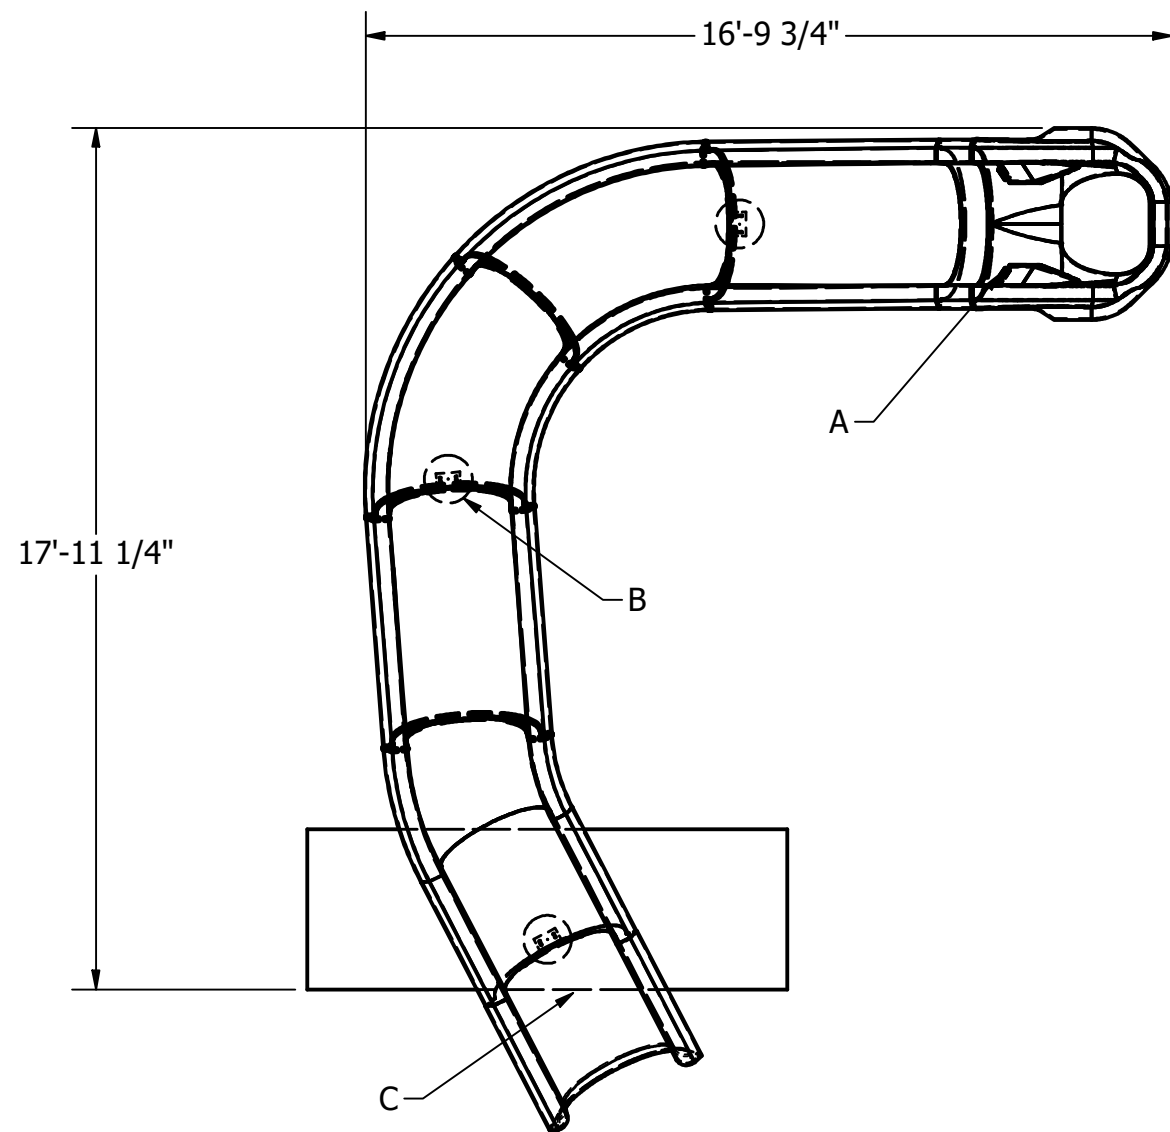

- A. (2) 3" PVC water outlets. One on each side of the start tub.
- B. Flume Support Brackets (3) Recommended for use with 12" Concrete Columns (Columns are Not Provided)
- C. Elevation @ Pool Coping 0'-2" Where Slide Crosses Coping. Recommend 5' Min. Clearance on either Side of Pool Exit.

Min. Slide Exit Splashdown Envelope: Min 10' Width x 14' Length. Min Water Depth 42" Recommend 72" for Large Slides and Steeper Versions

Slide Views					
Installation Drawing					
Paradise Slides, Inc.					
243 Singing Tree Ln, Cleveland GA 30528					
Flume Type:	32" Open Flume	Recommended GPM:	200 GPM	Ride Length:	34.42'
Drawing Scale:	1/4"=1'-0"	Drawn By:	Tim	Slope:	27.75%
Date:	March 19, 2026	Model #	PS35T5L-S	Sheet #	PS35T5L